


New Defender Wheelclamp Instructions



Diagram

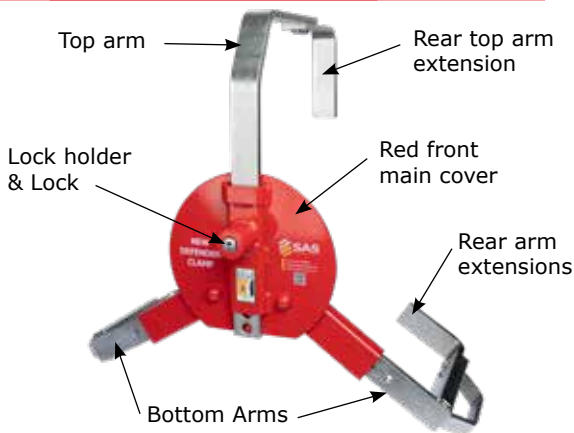

Maintenance

On a regular basis for optimum performance:


- Clean and lubricate moving parts. We recommend using SAS Corrosion Block Waterproof Grease for moving parts.
- We recommend using SAS Mint General Protectant Spray to lubricate and protect the locks of all our products.

Spare Parts

Replacement Parts can be ordered at your local SAS dealer, or online at www.sasproducts.com



Your New Defender consists of:

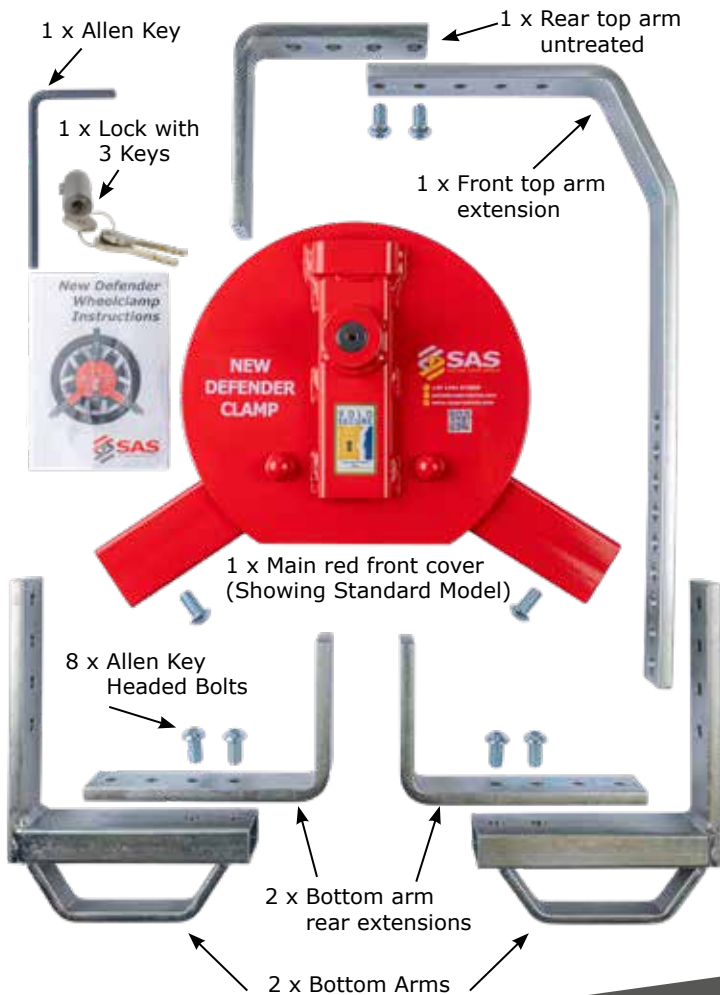

To Assemble

Your New Defender needs assembling prior to use, and once it is set for your wheel size, it needs no further adjustment.



- 1** Slide the Rear Extensions into the corresponding sleeves on the Bottom Arms to fit the wheel width as tightly as possible.

Secure each using 1 or 2 Allen Cap Head Bolts.



- 2** Assemble Top Arm to unthreaded Top Arm Rear Extension.

For maximum security, the Allen Cap Head bolts **MUST** be inserted from the underside of the arm so they sit against the tread of the tyre when the clamp is fitted.

NB—Images show Standard Model

- 3** Slide the Bottom Arms into the corresponding 2 Pivoting Arms attached to the Red Front Cover, and secure in place with Allen Cap Head bolts.



- 4** Position the Red Housing Cover against the wheel, with the lock facing you, and the 2 pivoting arms towards the ground, in the best position to cover the wheel nuts as centrally on the wheel as possible.



To Assemble

Ensure that the hand brake is applied or the vehicle securely chocked.



5 Remove the barrel lock by inserting the key making sure that the key goes all the way into the barrel, leaving approximately 10mm of the key shaft exposed. Turn the key 180 degrees in a clockwise direction and pull out the lock.



6 Position the Red Front Cover against the wheel with the lock, partially inserted, facing you and the 2 pivoting arms on the ground and surrounding the wheel.



7 Slide the Top Arm over your wheel with the longer arm nearest you. Lifting the red front cover, slide the top arm through the locking slot in the red front cover until you have a tight fit.

With the key in position, re-insert the barrel lock and turn the key and lock in a clockwise direction until the lock seats within the lock housing, and the lock and key will not turn any further. Now turn the key 180 degrees in an anti-clockwise direction to lock the barrel, and remove the key.

About SAS

For over 38 years, SAS has been dedicated to designing and manufacturing reliable security solutions to protect your most valuable assets. Our robust products are rigorously tested and we are proud to say are trusted by owners, insurers, and industry experts alike. We offer a full range of security solutions, including **wheel clamps, hitch locks, garage locks, and other universal security products.**

Visit the SAS website to explore our full range of security products and SECURE YOUR WORLD TODAY!

Hitch Locks

Lock Hitched - Easy to secure caravan to vehicle when stationary.

Lock Unhitched - Quickly secure caravan when parking uncoupled from vehicle.



Wheel Clamps

Stop unauthorised movement of your Caravan, Motorhome, Trailer or Vehicle by securing the wheel.



Security Posts

Heavy Duty removable security posts. Increase security with optional tow ball bracket to secure caravan/trailer to post.



Chains & Padlocks

Extensive range of chains and padlocks to restrain your Caravan.



Ground Anchors

Simply create an anchor point to secure your chained Caravan to deter theft.



SAS Security Products Ltd

+44 1444 675889

sales@sasproducts.com

www.sasproducts.com

